

english catalogue

# SAFETY SHOES & WORKWEAR




















# SPARCO AND SAFETY: AN INDISSOLUBLE COMBINATION

When you think about the concept of safety, the connection to Sparco is almost automatic. For more than forty years Sparco has been the official safety supplier of the most important world teams in the most dangerous sport in the world: MOTORSPORT.

Piquet, Prost, Schumacher, Hakkinen, Alonso, Loeb, Hamilton, Sainz (Sr. and Jr.), Ogier, Ricciardo, Norris - just to name a few - have relied or rely on Sparco to guarantee their safety during racing and to have the best performance in terms of comfort, weight and breathability.

Sparco Teamwork is the collection of shoes and workwear in which safety, lightness and design draw inspiration from the motorsport experience, translating into a work key with the same goal: to guarantee maximum performance.

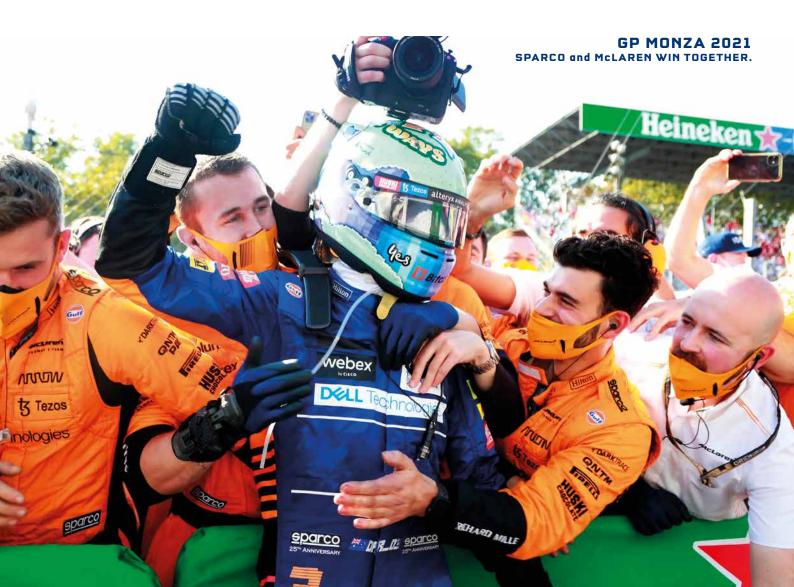

# KNOW-HOW SPARCO TEAMWORK

Its attention to detail, care devoted to the choice of sustainable materials and its construction of models totally styled, designed and validated in Italy has allowed SPARCO TEAMWORK to develop safety footwear with new sporty, comfortable and resistant lines in compliance with the ESSENTIAL REQUIREMENTS OF HEALTH AND SAFETY defined by Regulation (EU) 2016/425 on Personal Protective Equipment (PPE) with the (€ mark.

Sparco Teamwork also wants to respond to all those workers who question the social costs demanded by the environment and the situations of exploitation of labour for their production through:

- A conscious and efficient use of environmental resources as common assets;
- The ability to enhance human resources and contribute to the development of the local community in which the company operates;
- Control of the entire supply chain by integrating environmental and energy factors, the safety of materials, biodegradability, recycling and logistics;
- Respect for the fundamental rights of people and workers considering compliance with labour law, protection against child exploitation, guarantees of safety and health in the workplace;
- The enhancement of diversity and inclusion by promoting gender plurality, ethnic, religious and sexual diversity and psycho-physical skills in order to improve people's motivation through training courses dedicated to professional development.

We are convinced that a new SPARCO TEAMWORK brand safety shoe can be born only from new business models and projects that take into account the aforementioned fundamentals.



6

# CONTENTS 2022

# SAFETY SHOES LINES




























8



# WORKWEAR















GLOVES







# POP TOOLS





# TEAMWORK TECHNOLOGY

SPARCO TEAMWORK shoes are developed using the best technologies in terms of soles and midsoles, in order to optimize the exertion produced in walking by the sole of the foot where the greatest stresses for the user are concentrated, thus returning 70% of the ENERGY produced.

This benefit offers advantages in using SPARCO TEAMWORK footwear, such as:

- less fatigue at the end of the day, thus improving reflexes and attention to the dangers of slipping and tripping injuries
- less exertion in walking
- less strain on the back and spine
- relaxation of the muscles



SRC

Anti-fatigue lug to increase energy absorption.

Laminar engraving

for maximum grip.

Ultralight sole with PHYLON midsole and CROSSGRIP

on particularly uneven surfaces.

rubber tread with lugs that guarantee a strong grip even

Laminar profiles for greater slipping resistance.

SRC

The special design of the MOTIONGRIP sole lugs is conceived to follow all the movements of the foot, guaranteeing ultimate grip.



# 





to increase grip.

Ultralight sole in single-density polyurethane designed for intensive use where the foot bends frequently.

## PRISMFLEX



Engraving of closely spaced lugs for maximum grip on oily surfaces.

Engraved crampons for greater arip on stairs.



Sharp-angled lugs for greater grip on oily surfaces.

Ultralight sole with EVA midsole and genuine rubber tread with PRISMA texture that provides strong grip in all foot bending conditions.



Ultralight dual-density polyurethane sole designed to facilitate dynamic use and move safely in all situations.

Ultralight sole with phylon midsole and rubber tread. Ideal for all uses, even for outdoors in leisure time.





# GYMKHANA Ling

#### SNEAKER-STYLE SAFETY FOOTWEAR,

WITH EVA MIDSOLE AND MULTIGRIP RUBBER TREAD, VELOUR MICROFIBRE UPPER AND BREATHABLE MICRO-PERFORATED FABRIC. CONVENIENT FOR ALL USES.

( EN ISO 20345:2011



07527..AZBM

#### LANDO S1P SRC

METAL

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE:

EVA midsole and nitrile rubber tread with energy absorption on heel. **REMOVABLE INSOLE:** 

antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

in velour microfibre and breathable micro-perforated fabric. Additional 2nd color laces included.

> **SIZES:** 36-48 (UK 3 ½ -13)



#### DANI S1P SRC

TOE CAP: in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. SOLE: EVA midsole and nitrile rubber tread with energy absorption on heel. **REMOVABLE INSOLE:** YAAKHAN/ antistatic in PU with ergonomic thermoforming. LINING: breathable micro-perforated 3D fabric. **UPPER:** in velour microfibre and breathable micro-perforated fabric. Additional 2nd color laces included. SIZES:

36-48 (UK 3 ½ -13)

S



Sculpted lugs for greater slip resistance.

Self-cleaning profiles for the drainage of liquids.

#### SUPERLIGHT EVA MIDSOLE AND MULTIGRIP RUBBER TREAD.

MAX S1P SRC

SEB S1P SRC

Self-cleaning profiles for the outflow of liquids.

#### 07527..NRGR

#### TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

**ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre.

**SOLE:** EVA midsole and nitrile rubber tread

with energy absorption on heel. **REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING:

breathable micro-perforated 3D fabric.

in velour microfibre and breathable micro-perforated fabric. Additional 2nd color laces included.

> **SIZES:** 36-48 (UK 3 ½ -13)

#### 07527..VSLI





# NEW GYMKHANA LİD@ MARTINI RACING

SNEAKER-STYLE SAFETY FOOTWEAR WITH SPECIAL MARTINI RACING LIVERY, EVA MIDSOLE AND MULTIGRIP RUBBER TREAD, VELOUR MICROFIBRE UPPER AND BREATHABLE MICRO-PERFORATED FABRIC. CONVENIENT FOR ALL USES.

GYMKHANA

0





( EN ISO 20345:2011

#### MARTINI S1P SRC

METAL

#### 07527MR..BM

TOE CAP: in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. SOLE: EVA midsole and nitrile rubber tread with energy absorption on heel. **REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming. LINING: breathable micro-perforated 3D fabric. **UPPER:** in velour microfibre and breathable micro-perforated fabric. Additional 2nd color laces included. SIZES:

36-48 (UK 3 ½-13)

002020MR..

SPECIFICATIONS: Original replica suit of the iconic Sparco - Martini Racing Mechanic suit.

> MATERIAL: 85% polyester 15% cotton SIZES: S-XXL

Visit sparco-official.com



# PRACTICE Ling

RUNNING-STYLE SAFETY FOOTWEAR WITH BREATHABLE MICRO-PERFORATED 3D FABRIC AND SCRATCH-RESISTANT MICROFIBRE. IDEAL FOR INDOOR USE.

EN ISO 20345:2011

#### 07517..NRGF

#### TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE:

single-density PU with energy absorption on the heel.

**REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

**LINING:** breathable micro-perforated 3D fabric.

#### UPPER:

breathable micro-perforated fabric and scratch-resistant microfibre with high abrasion resistance.

**SIZES:** 36-48 (UK 3 ½ -13)

# 07517..NRNR

#### NIGEL S1P SRC

**JOS S1P SRC** 


TOE CAP: in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SolE: single-density PU with energy absorption on the heel. REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming. LINING:

breathable micro-perforated 3D fabric. UPPER: breathable micro-perforated fabric

and scratch-resistant microfibre with high abrasion resistance.

**SIZES:** 36-48 (UK 3 ½ -13)





Profiles engraved for a better grip on the stairs.

Laminar profiles for greater slipping resistance.

Laminar profiles to increase grip.

ULTRA-FLEXIBLE SINGLE-DENSITY PU THAT INCREASES COMFORT AND REDUCES STRESS TO THE LOWER LIMBS AND THE SPINE.

**JACQUES S1P SRC** 

**JODY S1P SRC** 

#### 07517..NRRS



#### 07517..NRFU

# 07517.



SIZES: 36-43 (UK 3 ½ - 9)

#### **KEKE S1P SRC**

#### 07517..NRVF

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

**ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre.

SOLE: single-density PU with energy absorption on the heel.

**REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING:

breathable micro-perforated 3D fabric.

breathable micro-perforated fabric and scratch-resistant microfibre with high abrasion resistance.

> **SIZES:** 36-48 (UK 3 ½ -13)



## 07517..NRAZ

#### TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre.

**SOLE:** single-density PU with energy absorption on the heel.

**REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

#### UPPER:

breathable micro-perforated fabric and scratch-resistant microfibre with high abrasion resistance.

**SIZES:** 36-48 (UK 3 ½ -13)

# 07517..AZAF

#### NIKI S1P SRC

The CAP: in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE: single-density PU with energy absorption on the heed. REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming. LINING: breathable micro-perforated 3D fabric. UPPER: breathable micro-perforated fabric and scratch-resistant microfibre with high abrasion resistance.

> SIZES: 36-48 (UK 3 ½ -13)

20

## **NELSON S1P SRC**

PRACTICE LING



# NITRO Line

#### RUNNING-STYLE SAFETY FOOTWEAR IN WATER-REPELLENT MICROFIBRE AND SUEDE, IDEAL FOR BOTH INDOOR AND OUTDOOR USE.

Laminar profiles to increase grip. NITRO

ofiles Laminar profiles for greater grip. slipping resistance. Profiles engraved for a better grip on the stairs.

SOCI

ULTRA-FLEXIBLE SINGLE-DENSITY PU THAT INCREASES COMFORT AND REDUCES STRESS TO THE LOWER LIMBS AND THE SPINE. 

22

NITRO LING

<u>9</u>°

#### 07522..NRAZ

#### PETTER S3 SRC

**DIDIER S3 SRC** 

**TOE CAP:** in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. SOLE: single-density PU with energy absorption on the heel.

**REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric. **UPPER:** in high-quality water-repellent microfibre. SIZES:

36-48 (UK 3 ½-13)

#### 07522..NRGR

TOE CAP: in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. SOLE: single-density PU with energy absorption on the heel.

> **REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric. **UPPER:** in high-quality water-repellent microfibre.

SIZES: 36-48 (UK 3 1/2 -13)

#### 07522...RSNR

# **TOE CAP:**

in non-magnetic composite, insulating, resistant to 200J.

**ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. SOLE:

single-density PU with energy absorption on the heel. **REMOVABLE INSOLE:** 

antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

**UPPER:** in high-quality water-repellent microfibre and suede.

> SIZES: 36-48 (UK 3 1/2 -13)







# MARCUS S3 SRC

#### 07522..NRVF

#### OTT S3 SRC

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre. SOLE: single-density PU with energy

absorption on the heel. **REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric. UPPER: in high-quality water-repellent microfibre. SIZES:

36-48 (UK 3 ½ -13)



## 07522..BIBI

#### TOE CAP:

in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

**SOLE:** single-density PU with energy absorption on the heel.

**REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric. UPPER:

in high-quality water-repellent microfibre.

36-48 (UK 3 ½ -13)

## 07522..NRNR

#### MIKKO S3 SRC

HANNU S3 SRC

TOE CAP: in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre.

single-density PU with energy absorption on the heel.

> **REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

UPPER: in high-quality water-repellent microfibre. SIZES:

36-48 (UK 3 ½ -13)





# CUP Line

26

<u>9</u>°

SAFETY FOOTWEAR IN BREATHABLE JACQUARD FABRIC AND REINFORCEMENT IN PU FILM COATED ON THE TOE, IDEAL FOR INDOOR USE.


O Byoth

<u>sparco</u>

CUD

Engraving of closely spaced lugs for maximum grip on oily surfaces.

Sharp-angled lugs for greater grip on oily surfaces.



Engraved crampons for greater grip on stairs.

ULTRALIGHT EVA MIDSOLE AND NITRILE RUBBER TREAD WITH ENERGY ABSORPTION ON THE HEEL.

ĥ





#### **RICARD S1P SRC**

#### 07526..NRAZ

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

**ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre.

SOLE: EVA midsole and nitrile rubber tread with energy absorption on heel.

**REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric. **UPPER:** 

Ultra-breathable jacquard weave with PU film reinforcement coating on the toe.

> SIZES: 35-46 (UK 2 ½ - 11 ½)

#### 07526..NRVF

#### **TOE CAP:**

in non-magnetic composite, insulating, resistant to 200J.

**ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. SOLE:

EVA midsole and nitrile rubber tread with energy absorption on heel.

> **REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

> > LINING:

breathable micro-perforated 3D fabric. **UPPER:** 

Ultra-breathable jacquard weave with PU film reinforcement coating on the toe.

SIZES: 35-46 (UK 2 ½ - 11 ½)

#### 07526..NRRS

#### **TOE CAP:** in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. SOLE:

EVA midsole and nitrile rubber tread with energy absorption on heel.

**REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

**UPPER:** 

CUP Ling

Ultra-breathable jacquard weave with PU film reinforcement coating on the toe.

SIZES: 35-46 (UK 2 ½ - 11 ½)

## **ADELAIDE S1P SRC**



span









spar



# METAL

# SPORT EVO Line RACING EVO Line

SAFETY FOOTWEAR COMING FROM THE WORLD OF RACING IN HIGH-QUALITY SMOOTH AND SUEDE OR NUBUCK LEATHER, ELEGANT, COMFORTABLE AND HARD-WEARING, IDEAL FOR OUTDOOR USE.

( EN ISO 20345:2011



#### SPA ESD S3 SRC



07516..NRGR

TOE CAP: in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE:

dual-density PU with energy absorption on the heel.

**REMOVABLE INSOLE:** Antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

UPPER: in high-quality nubuck leather with scratch-resistant microfibre heel insert.

> **SIZES:** 38-48 (UK 5 - 13)



#### LOSAIL S3 SRC

TOE CAP: in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE: dual-density PU with energy absorption on the heel. REMOVABLE INSOLE: Antistatic in PU with ergonomic thermoforming.

**LINING:** breathable micro-perforated 3D fabric.

UPPER: in high-quality water-repellent suede leather with scratch-resistant microfibre heel insert.

**SIZES:** 38-48 (UK 5 - 13)



<u>9</u>°



Laminar profiles to increase grip. Self-cleaning lugs to improve sliding. Sparco\*

SPORTS SOLE COMING FROM THE MOTORSPORT WORLD WITH EXCELLENT TECHNICAL AND NON-SLIP PROPERTIES PROVIDED BY THE LUGS DESIGNED FOR GREATER DIAGONAL AND LONGITUDINAL GRIP. THE TREAD ASSISTS BENDING WHILE WALKING AND PREVENTS PROBLEMS TO THE LOWER LIMBS AND THE SPINE.



#### RONNIE ESD S3 SRC

**CLAY S3 SRC** 

#### 07515..NRVF



**SIZES:** 38-48 (UK 5 - 13)

#### 07515..NRNR



#### 07516..RSNR

#### DONINGTON S3 SRC

**BRUCE S3 SRC** 

METAL

TOE CAP:

in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

SOLE: dual-density PU with energy absorption on the heel.

**REMOVABLE INSOLE:** Antistatic in PU with ergonomic thermoforming.

LINING:

breathable micro-perforated 3D fabric.

#### UPPER

In high-quality nubuck leather and water-repellent suede leather inserts with scratch-resistant microfibre heel insert.

**SIZES:** 38-48 (UK 5 - 13)

## 07515..RSNR

#### TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

**ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre.

SOLE: dual-density PU with energy absorption on the heel.

**REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

#### UPPER:

in high-quality smooth leather, nubuck leather and water-repellent suede leather, tongue in soft nylon and inserts in scratch-resistant microfibre.

> **SIZES:** 38-48 (UK 5 - 13)

## 07515..AZAZ

## GILLES ESD S3 SRC

TOE CAP: in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE: dual-density PU with energy absorption on the heel. REMOVABLE INSOLE:

antistatic in PU with ergonomic thermoforming. LINING:

breathable micro-perforated 3D fabric.

UPPER: In high-quality water-repellent suede leather, soft nylon tongue

**SIZES:** 38-48 (UK 5 - 13)



# Line

SNEAKER-STYLE SAFETY FOOTWEAR, COMFORTABLE AND SUITABLE FOR PROLONGED **USE IN A PROFESSIONAL** AND URBAN ENVIRONMENT.



( EN ISO 20345:2011

#### 07518..BMAZ

#### TOE CAP:

in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** 

made from zero-perforation textile fibre. SOLE:

dual-density PU with energy absorption on the heel.

**REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

**UPPER:** in nylon with reinforcements in high-quality water-repellent suede leather.

> SIZES: 38-48 (UK 5 - 13)



#### **MODENA S3 SRC**

**TOE CAP:** in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE: dual-density PU with energy absorption on the heel. **REMOVABLE INSOLE:** 

antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric. **UPPER:** 

in nylon with reinforcements in high-quality water-repellent suede leather.

> SIZES: 38-48 (UK 5 - 13)

# METAL





S

MAGIONE ESD S3 SRC



FOR GREATER DIAGONAL AND LONGITUDINAL GRIP. THE TREAD ASSISTS BENDING WHILE WALKING AND PREVENTS PROBLEMS TO THE LOWER LIMBS AND THE SPINE.

SARNO S1P SRC

LONATO S1P SRC



#### 07518..BMGR

#### **TOE CAP:**

in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. SOLE:

dual-density PU with energy absorption on the heel. **REMOVABLE INSOLE:** 

antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

**UPPER:** in nylon with reinforcements in high-quality suede leather.

> SIZES: 38-48 (UK 5 - 13)

#### 07518..NRNR



38-48 (UK 5 - 13)

# **JRBAN EVO LING**

# LEGEND Line

**S** 

ULTRALIGHT SAFETY FOOTWEAR WITH SOCK UPPER, IN BREATHABLE MICRO-PERFORATED 3D FABRIC WITH HF PROCESSING AND WATER-REPELLENT FILM COATING, MICRO-INJECTED REINFORCEMENTS AND GENUINE CARBON FIBRE TOE CAP. IDEAL FOR BOTH INDOOR AND OUTDOOR USE.

<u>eparco</u>

( EN ISO 20345:2011

#### 07525..NRRS

10,5

MONDOPOINT

TOE CAP: in carbon fibre, non-magnetic, insulating, resistant to 200J. ANTI-PERFORATION INSOLE:

> made from zero-perforation textile fibre. SOLE: dual-density polyurethane with energy absorption on the heel.

REMOVABLE INSOLE: antistatic in PU with ergonomic thermoforming.

> LINING: in breathable sock knit. UPPER:

sock type in breathable micro-perforated 3D fabric, high-frequency processing and water-repellent film coating, micro-injected inserts.

> **SIZES:** 38-48 (UK 5 - 13)

#### SPLITTER ESD S3 SRC



Laminar profiles to increase grip. Laminar profiles for greater slipping resistance.

Profiles engraved for enhanced grip on stairs.

#### DOUBLE DENSITY PU WITH ENERGY ABSORPTION IN THE HEEL

SPOILER ESD S3 SRC

MOTIONGSIP



#### 07525..NRGR



**SIZES:** 38-48 (UK 5 - 13)

#### FLAP ESD S1P SRC

#### 07525..BMAF

#### TOE CAP:

in carbon fibre, non-magnetic, insulating, resistant to 200J. ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

dual-density polyurethane with energy absorption on the heel.

**REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

> LINING: in breathable sock knit.

#### UPPER:

sock type in breathable micro-perforated 3D fabric, high-frequency processing and micro-injected inserts.

> **SIZES:** 38-48 (UK 5 - 13)



## 07525..NRAZ

#### TOE CAP:

in carbon fibre, non-magnetic, insulating, resistant to 200J. ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

#### SOLE:

dual-density polyurethane with energy absorption on the heel.

**REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: in breathable sock knit.


#### UPPER:

sock type in breathable micro-perforated 3D fabric, high-frequency processing and micro-injected inserts.

**SIZES:** 38-48 (UK 5 - 13)

## 07525..NRVF

## HALO ESD S1P SRC



dual-density polyurethane with energy absorption on the heel.

**REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: in breathable sock knit. UPPER:

sock type in breathable micro-perforated 3D fabric, high-frequency processing and micro-injected inserts.

> **SIZES:** 38-48 (UK 5 - 13)



36

## WING ESD S1P SRC



# ALLROAD Line

SAFETY FOOTWEAR IN NYLON AND WATER-REPELLENT MICROFIBRE. PHYLON SOLE WITH CROSSGRIP RUBBER BOTTOM. LIGHT, DURABLE AND SUITABLE FOR ALL TYPES OF USE (OUTDOOR AND INDOOR).



**BAKU S3 SRC** 

#### 07528..NRVF

11

MONDOPOINT

#### **TOE CAP:** in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE: phylon + nitrile rubber with energy

absorption on the heel. **REMOVABLE INSOLE:** antistatic in PU with ergonomic

thermoforming. LINING: breathable micro-perforated 3D fabric. UPPER:

in nylon and water-repellent microfibre.

**SIZES:** 38-48 (UK 5 - 13)



S



ULTRALIGHT SOLE WITH PHYLON\* MIDSOLE AND CROSSGRIP RUBBER TREAD. IT FEATURES AN IDEAL SCULPTURE FOR MAXIMUM GRIP AND STABILISATION ON GRAVELLY, MUDDY AND SNOW-COVERED SURFACES. LIGHT AND COMFORTABLE, IT ABSORBS VIBRATIONS AND PREVENTS DAMAGE TO THE LOWER LIMBS AND THE SPINE.

\* Phylon is a light and resistant plastic made with EVA foam obtained by injection of compressed air.



#### SOCHI S3 SRC

#### 07528..BMGF

**TOE CAP:** in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE: phylon + nitrile rubber with energy absorption on the heel.

> **REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric. UPPER: in nylon and water-repellent microfibre. SIZES:

38-48 (UK 5 - 13)



#### 07528..NRNR

#### TOE CAP:

in non-magnetic composite, insulating, resistant to 200J. ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

SOLE: phylon + nitrile rubber with energy absorption on the heel.

**REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric. UPPER:

in nylon and water-repellent microfibre.
SIZES:

38-48 (UK 5 - 13)





#### 07529..NRNR

## OKAYAMA S3 SRC

**TOE CAP:** in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre. SOLE:

phylon + nitrile rubber with energy absorption on the heel. **REMOVABLE INSOLE:** 

antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

**UPPER:** in nylon and water-repellent microfibre.

**SIZES:** 38-48 (UK 5 - 13)





# CHALLENGE Ling

SAFETY FOOTWEAR IN NYLON AND SUEDE. Durable and suitable for all types of use (outdoor and indoor).

Anti-fatigue cell to increase energy absorption.

Self-cleaning lugs.

sparco

SOLE IN DUAL-DENSITY POLYURETHANE WITH ENERGY ABSORPTION ON THE HEEL.

Profiles engraved for enhanced grip on stairs.





42

CHALLENGE LING

#### 07519...NRNR

**TOE CAP:** in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. SOLE:

> dual-density polyurethane with energy absorption on the heel. **REMOVABLE INSOLE:**

antistatic in PU LINING:

breathable micro-perforated 3D fabric. **UPPER:** in fine suede with high abrasion resistance. SIZES:

36-48 (UK 3 ½-13)

#### 07519..NRRS

**TOE CAP:** 

SOLE: dual-density polyurethane

**REMOVABLE INSOLE:** 

LINING:

**UPPER:** SIZES:

#### 07524..NRNR

in water penetration-resistant nylon and suede.

SIZES: 36-48 (UK 3 1/2 -13) CHALLENGE Ling











METAL

# ARCTIC Line

#### SAFETY ANKLE BOOTS WITH SPECIAL

sparco

DRY RESPIRATION SYSTEM (DRS) WATER-RESISTANT MEMBRANE, IN HIGH-QUALITY WATER-REPELLENT MICROFIBRE AND MICRO-INJECTED INSERTS. HARD-WEARING AND BREATHABLE, IT IS IDEAL IN PARTICULARLY DAMP OR WET ENVIRONMENTS.

Profiles engraved for enhanced grip on stairs.

Self-cleaning lugs.

Anti-fatigue cell to increase energy absorption.

SOLE IN DUAL-DENSITY **POLYURETHANE WITH ENERGY** ABSORPTION ON THE HEEL.





#### ARCTIC S3 WR SRC

#### 07533..NRAZ

TOE CAP:

fibreglass, non-magnetic, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. **SOLE:** 

dual-density polyurethane with energy absorption on the heel.

**REMOVABLE INSOLE:** antistatic in PU.

LINING:

breathable micro-perforated 3D fabric.

in high-quality water-repellent microfibre, micro-injected inserts and special DRS WATER-RESISTANT membrane.

> **SIZES:** 36-47 (UK 3 ½ -12)

Footwear designed for all those who are forced to work in environments characterised by a high presence of water. WR footwear is in fact made with materials and techniques that prevent the entry of water while guaranteeing excellent breathability and therefore perfect hygrothermal comfort.

#### WALK TEST

METAL


#### (according to EN ISO 20345:2011)

1,000 steps (about 20 min.) in a tank containing 3 cm of water, the wet internal surface must be ≤ 3 cm2.



#### **DRS MEMBRANE BY SPARCO TEAMWORK** (DRY RESPIRATION SYSTEM):

The special DRS membrane by SPARCO TEAMWORK ensures maximum breathability and comfort while preventing water from penetrating into the upper, leaving the feet always dry and protected.

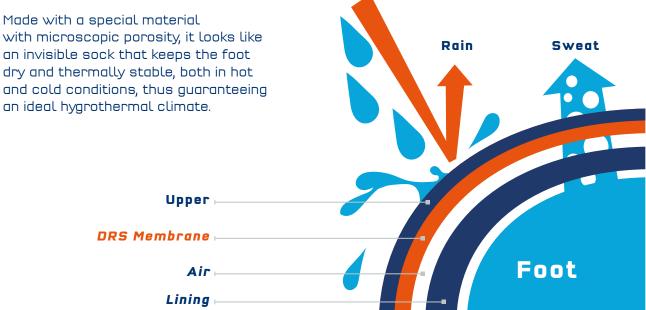


# TORQUE Line

TORO

**S** 

ULTRALIGHT, FLEXIBLE AND BREATHABLE OCCUPATIONAL FOOTWEAR. DESIGNED FOR WORK WHERE THE RISK ANALYSIS REQUIRES NEITHER A PROTECTIVE TOE NOR AN ANTI-PERFORATION PLATE, TO GIVE THE USER MAXIMUM COMFORT IN COMPLIANCE WITH THE SAFETY AND HEALTH REQUIREMENTS OF THE EN ISO 20347:2012 STANDARD - (€ MARKING.



# IO,5

#### PALMA 01 SRA



#### 001289..NRNR

SOLE:

phylon midsole and nitrile rubber tread. **INSOLE:** 

breathable in memory foam. LINING:

breathable micro-perforated 3D fabric.

with breathable micro-perforated fabric, micro-injected reinforcement on ultra-abrasion-resistant toe.

> **SIZES:** 37-47 (UK 4 ½ - 12)



\* Phylon is a light and resistant plastic made with EVA foam obtained by injection of compressed air.

#### DURANGO O1 SRA

# <image>

#### 001289..NRAZ

#### SOLE:

phylon midsole and nitrile rubber tread. **INSOLE:** breathable in memory foam. **LINING:** breathable micro-perforated 3D fabric.

UPPER:

with breathable micro-perforated fabric, micro-injected reinforcement on ultra-abrasion-resistant toe.

**SIZES:** 37-47 (UK 4 ½ - 12) **FORQUE** LING

#### CHARADE 01 SRA

#### 001289..BMAF

#### SOLE:

phylon midsole and nitrile rubber tread. **INSOLE:** 

breathable in memory foam.


LINING: breathable micro-perforated 3D fabric. UPPER:

with breathable micro-perforated fabric, micro-injected reinforcement on ultra-abrasion-resistant toe.

SIZES: 37-47 (UK 4 ½ - 12)



#### **ALGARVE 01 SRA**

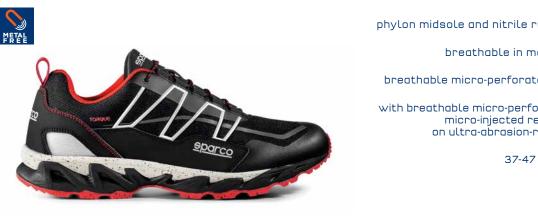

#### 001289..NRRS

#### SOLE:

phylon midsole and nitrile rubber tread. **INSOLE:** 

breathable in memory foam. LINING:

breathable micro-perforated 3D fabric. **UPPER:** 

with breathable micro-perforated fabric, micro-injected reinforcement on ultra-abrasion-resistant toe. SIZES:

37-47 (UK 4 ½ - 12)

#### **BOAVISTA 01 SRA**



#### 001289..NRGF

#### SOLE:

phylon midsole and nitrile rubber tread. **INSOLE:** 

breathable in memory foam. LINING:

breathable micro-perforated 3D fabric. **UPPER:** 

with breathable micro-perforated fabric, micro-injected reinforcement on ultra-abrasion-resistant toe.

> SIZES: 37-47 (UK 4 ½ - 12)



# NEW TORQUE LİN@ MARTINI RACING

ULTRALIGHT, FLEXIBLE AND BREATHABLE OCCUPATIONAL FOOTWEAR IN MARTINI RACING LIVERY. DESIGNED FOR WORK WHERE THE RISK ANALYSIS REQUIRES NEITHER A PROTECTIVE TOE NOR AN ANTI-PERFORATION PLATE, TO GIVE THE USER MAXIMUM COMFORT IN COMPLIANCE WITH THE SAFETY AND HEALTH REQUIREMENTS OF THE EN ISO 20347:2012 STANDARD - (€ MARKING.

> Self-cleaning profiles to increase flexibility.

OCCO

L Laminar profiles to increase grip.

Laminar engraving for greater slipping resistance.

#### ULTRALIGHT SOLE WITH PHYLON\* MIDSOLE AND RUBBER TREAD.

Phylon is a light and resistant plastic made with EVA foam obtained by injection of compressed air.



**TWIST**TECH

#### 01289MR..BM

#### SOLE: phylon midsole and nitrile rubber tread.

**INSOLE:** breathable in memory foam. LINING: breathable micro-perforated 3D fabric. **UPPER:** with breathable micro-perforated fabric,

micro-injected reinforcement on ultra-abrasion-resistant toe. SIZES:

37-47 (UK 4 ½ - 12)

001144MR..

#### **REPLICA HOODIE MARTINI RACING**

#### SPECIFICATIONS:

MIKI O1 SRA

Hooded sweatshirt made with an ultra-soft cotton blend featuring the iconic Martini Racing livery. The logo patches and stripes are fully embroidered.

#### MATERIAL:

65% cotton - 35% polyester 300 gr. m2 - hood lined in soft jersey SIZES: XS -XXL

Sparco

MAR


FACING

aparco


MARTIN

RACING



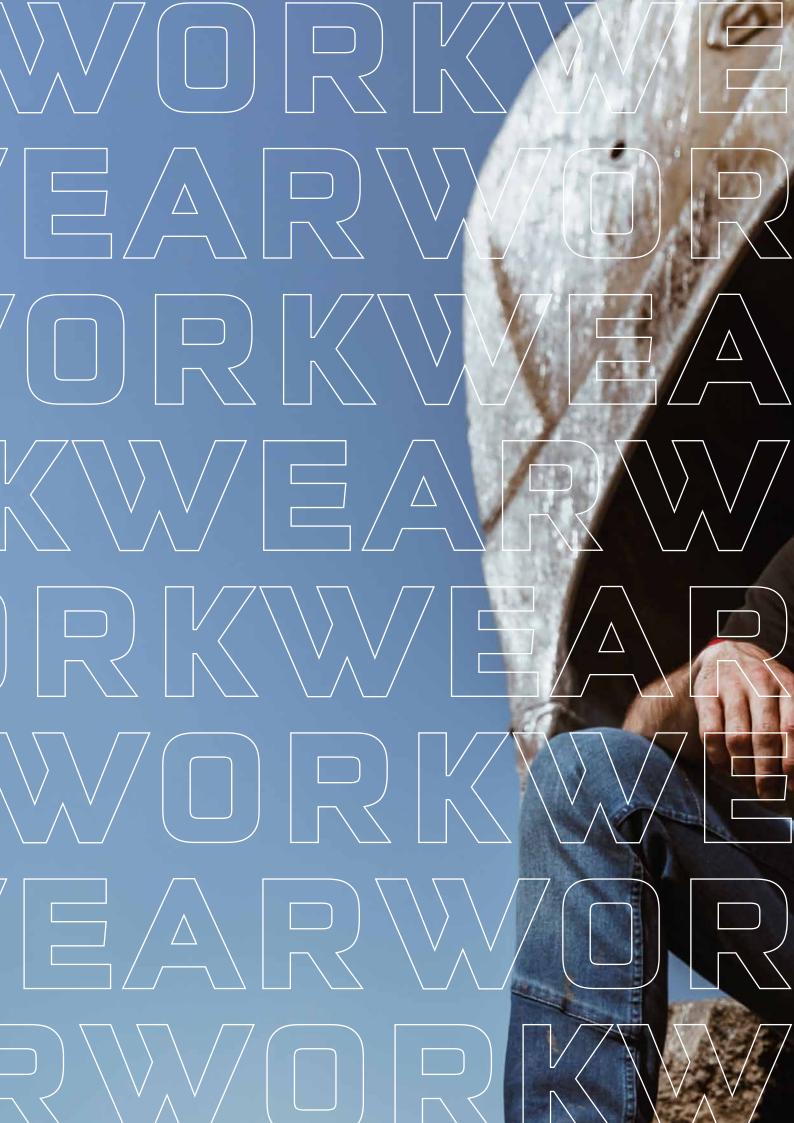



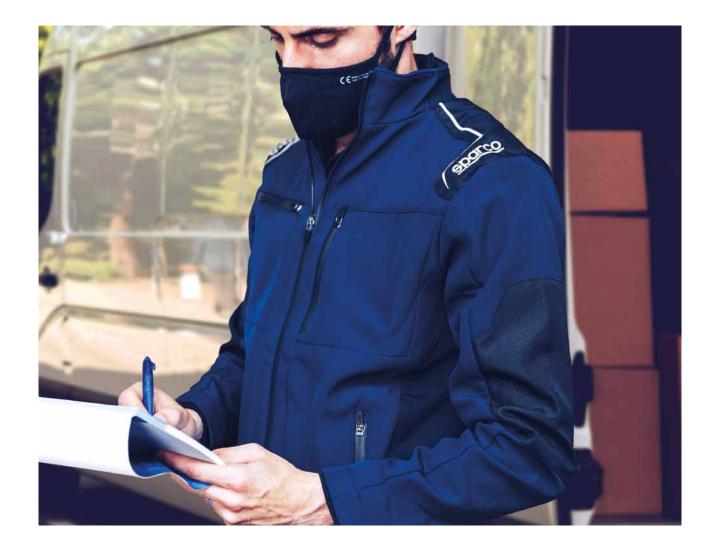



SOFTSHELL JACKET WEIGHT: 270 GR/M<sup>2</sup> COMPOSITION: 100% polyester SIZES: S - 3XL SPECIFICATIONS:

- Soft and light polyester water-repellent.
- Breathable stretch side inserts.
- Reinforced elbow inserts.
- Removable windproof hood.



SOFTSHELL JACKET WEIGHT: 270 GR/M<sup>2</sup> COMPOSITION: 100% polyester SIZES: S - 3XL

#### SPECIFICATIONS:

- Soft and light polyester water-repellent.
- Breathable stretch side inserts.
- Reinforced elbow inserts.
- Removable windproof hood.





#### HOUSTON

#### 02401GSRS..





#### CARGO MULTISEASON PANTS WEIGHT: 310/320 gr/sqm COMPOSITION: 98% canvas cotton 2% elastane SIZES: S - 3XL

#### SPECIFICATIONS:

- Resistant stretch canvas cotton
- padded inserts on knees
- Closing flap with contrasting interior and elasticated sides
- Multi-pocket



#### JEANS WEIGHT: 350 gr/m² COMPOSITION: 98% drill cotton • 2% elastane SIZES: S - 3XL

#### SPECIFICATIONS:

- Stretch denim.
- Contrasting interior and elasticated sides.
- 5 pockets.

PANTS



#### 02409DE..



#### **BOSTON BLACK**

#### 02400NR..



#### **CARGO MULTISEASON PANTS**

**WEIGHT:** 260/270 gr/m<sup>2</sup> **COMPOSITION**: 98% drill cotton • 2% elastane SIZES: S - 3XL

#### SPECIFICATIONS:

- Soft stretch drill cotton
- Closing flap with contrasting interior
- and elasticated sides

- Multi-pocket



02400GS..

#### **CARGO MULTISEASON PANTS**

WEIGHT: 260/270 gr/m<sup>2</sup> COMPOSITION: 98% drill cotton • 2% elastane SIZES: S - 3XL

#### SPECIFICATIONS:

- Soft stretch drill cotton

**BOSTON GREY** 

- Closing flap with contrasting interior
- and elasticated sides
- Multi-pocket



#### NEW

#### BERMUDA BLACK

02410NR..





#### BERMUDA CARGO

WEIGHT: 220 GR/M2 COMPOSITION: 97% cotton 3% elastane lycra gabardin SIZES: S - 2XL

#### SPECIFICATIONS:

- Soft and resistant stretch cotton fabric with contrast reinforcement stitching
- Flap closure at the waist with snap button,
- contrasting interior and elastic at the sides Multi-pocket

#### NEW

#### **BERMUDA GREY**

#### 02410GS..





#### BERMUDA CARGO

WEIGHT: 220 GR/M2 COMPOSITION: 97% cotton 3% elastane • lycra gabardin

#### SIZES: S - 2XL

#### SPECIFICATIONS:

- soft and resistant stretch cotton fabric with contrast reinforcement stitching
- flap closure at the waist with snap button,
- contrasting interior and elastic at the sides - multi-pocket



#### WILSON ROYAL

#### 02405AZ..



#### WINDSTOPPER JACKET

WEIGHT: 100 gr/m<sup>2</sup> COMPOSITION: 100% polyester SIZES: S - 3XL

#### SPECIFICATIONS:

- soft and lightweight water-repellent Polyester fabric.
- Coated zips with rubbered pullers.
- Elastic cuffs and hem.



#### WILSON NAVY

02405BM..



#### WINDSTOPPER JACKET

WEIGHT: 100 gr/m<sup>2</sup> COMPOSITION: 100% polyester SIZES: S - 3XL

#### SPECIFICATIONS:

- Soft and lightweight water-repellent Polyester fabric.
- Coated zips with rubbered pullers.
- Elastic cuffs and hem.



#### WINDSTOPPER JACKET

WEIGHT: 100 gr/m² COMPOSITION: 100% polyester SIZES: S - 3XL

#### SPECIFICATIONS:

- soft and lightweight water-repellent Polyester fabric.
- Coated zips with rubbered pullers.
- Elastic cuffs and hem.

## NEW

#### WILSON RED

#### 02405RS..



#### WINDSTOPPER JACKET

WEIGHT: 100 gr/m<sup>2</sup> COMPOSITION: 100% polyester SIZES: S - 3XL

#### SPECIFICATIONS:

- Soft and lightweight water-repellent Polyester fabric.
- Coated zips with rubbered pullers.
- Elastic cuffs and hem.





°



#### PHOENIX NAVY

#### 02406BM..



#### FULL-ZIP SWEATSHIRT WEIGHT: 260 gr/m<sup>2</sup> COMPOSITION: outside 100% polyester inside 100% cotton SIZES: S - 3XL

#### SPECIFICATIONS:

- External fabric in soft and light polyester.
- Soft cotton jersey lining.
- Coated zips with rubbered pullers.
- Elasticated cuffs.

#### PHOENIX RED





#### FULL-ZIP SWEATSHIRT

WEIGHT: 260 gr/m<sup>2</sup> COMPOSITION: outside 100% polyester inside 100% cotton SIZES: S - 3XL

#### SPECIFICATIONS:

- External fabric in soft and light polyester.
- Soft cotton jersey lining.
- Coated zips with rubbered pullers.Elasticated cuffs.



#### PORTLAND ROYAL 02407AZ..



POLO WEIGHT: 200 gr/m<sup>2</sup> COMPOSITION: 100% cotton SIZES: S - 3XL

**SPECIFICATIONS:** - Soft and light piqué cotton. - Contrast color inserts.

- Stretch sleeves hem.



#### POLO

WEIGHT: 200 gr/m<sup>2</sup> COMPOSITION: 100% cotton SIZES: S - 3XL

SPECIFICATIONS:

- Soft and light piqué cotton.

- Contrast color inserts.

- Stretch sleeves hem.



#### POLO

WEIGHT: 200 gr/m<sup>2</sup> COMPOSITION: 100% cotton SIZES: S - 3XL

SPECIFICATIONS:

- Soft and light piqué cotton.
- Contrast color inserts.
- Stretch sleeves hem.

62



#### TRENTON ROYAL

#### 02408AZ..



T-SHIRT WEIGHT: 180 gr/m<sup>2</sup> COMPOSITION: 95% cotton • 5% elastane SIZES: S - 3XL SPECIFICATIONS: Soft stretch cotton. - Contrast color inserts. - Soft rib collar.



T-SHIRT WEIGHT: 180 gr/m<sup>2</sup> COMPOSITION: 95% cotton • 5% elastane SIZES: S - 3XL SPECIFICATIONS:

- Soft stretch cotton.

- Contrast color inserts.

- Soft rib collar.







T-SHIRT WEIGHT: 180 gr/m<sup>2</sup> COMPOSITION: 95% cotton • 5% elastane SIZES: S - 3XL SPECIFICATIONS: - Soft stretch cotton.

- Contrast color inserts.
- Soft rib collar.

**F-SHIRT** 





#### SPORTAC (PPE CAT. II)

oarco

NEW

#### 66

#### 002097..GI

PROTECTIVE GLOVES • EN 388:2016 • EN ISO 21420

**PPE CATEGORY II:** Synthetic glove protecting against mechanical risks

ABRASION RESISTANCE: • 4 (performance levels)

RESISTANCE TO BLADE CUTTING: • Coupe test: X (not done)

TEAR RESISTANCE:4 (performance levels)

PUNCTURE RESISTANCE:3 (performance levels)

RESISTANCE TO CUTTING BY BLADE EN ISO 13997: • D (performance levels)

EN PROTECTION AGAINST IMPACTS: • P (performance level)

SIZES:

8-11

#### SPECIFICATIONS:

 Adamant<sup>®</sup> diamond structure for a maximum level of cutting resistance;

exceptional comfort and dexterity;

• palm resistant to grease and wet grime;

• impact resistant on the back, shock absorbing structure on the palm of the hand.

#### 002094..NRRS

MULTIPURPOSE GLOVES in micro-perforated polyamide and palm in high-grip microfibre, with fastening strap.

#### **COMPOSITION:**

85% polyamide

15% elastane


SIZES: S-XL

#### SPECIFICATIONS:

• touch-sensitive fingertips on index and thumb;

• foam protectors on the palm;

wrist fastening strap.





#### **MECA III**




and there are reinforcements positioned between the thumb and index finger;

• back in abrasion-resistant stretch and printed fabric;

• fastening strap to adjust fit.







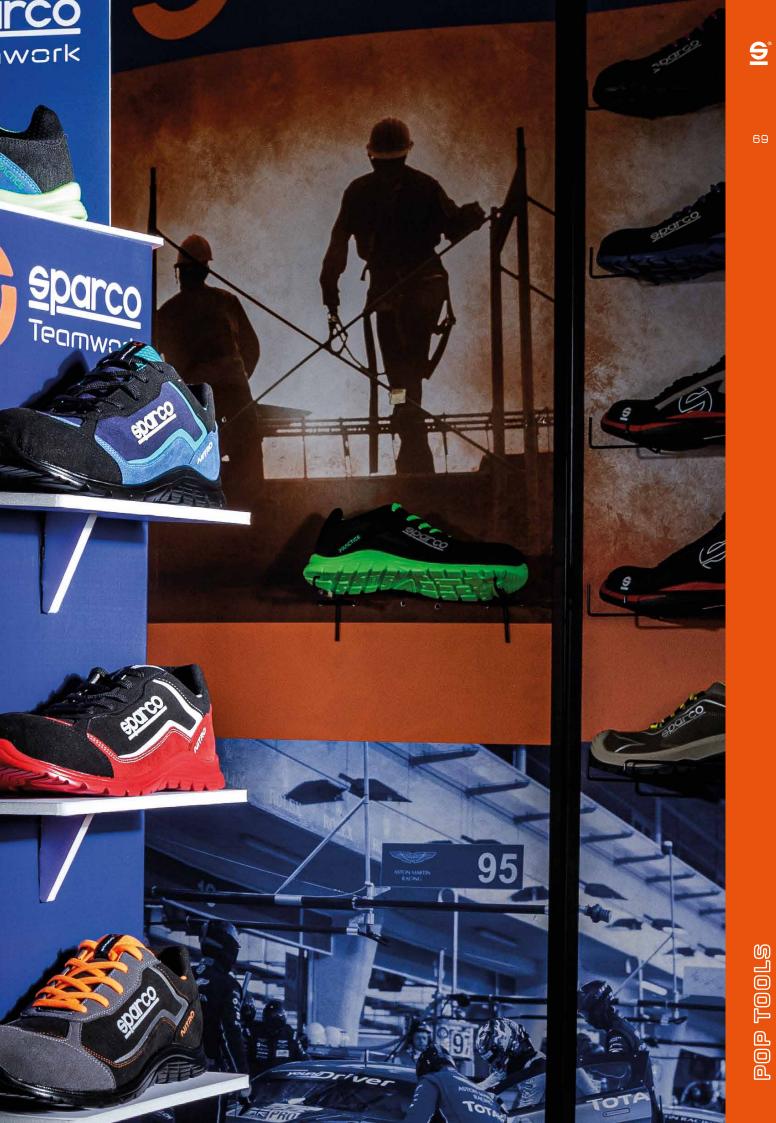

°



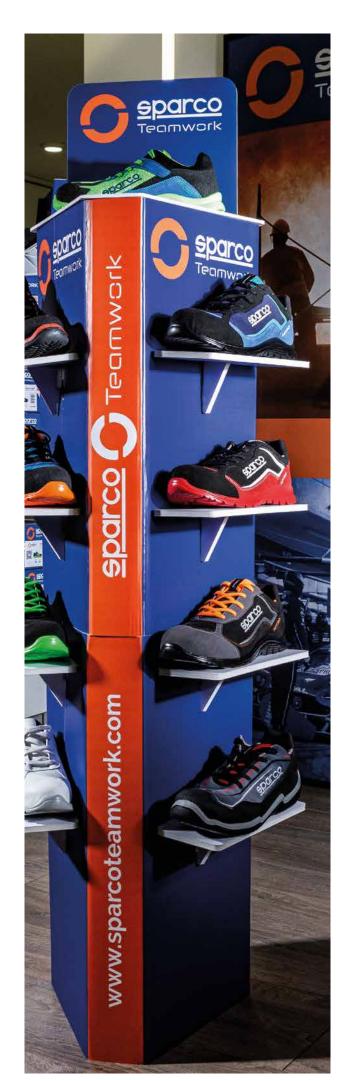

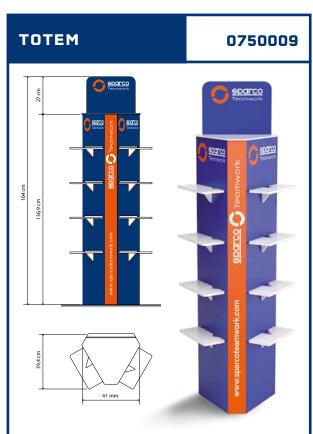

#### TOTEM

Light and durable material, suitable to show **8 shoe models** and a pair of shoes on the crowner.



H 17 X L 30 X P 17,5 CM Light and durable material, suitable to show 1 shoe. 5-piece set.

<u>5</u>

NEW

<text>



#### NEW







# Flyers container, light and durable material, with an unmistakable racing style.

# CERTIFICATIONS

#### GUIDE TO EN ISO 20345:2011 STANDARDS

Footwear for professional use in accordance with EN ISO 20345:2011 are marked with an "S" (Safety) as Safety Footwear. The so-called "basic" shoe is marked with the letters "SB" (S = Safety - "B" = Basic). This footwear must have the following minimum requirements:

height of the upper • toe cap (minimum length, minimum supporting base) • upper in fresh split leather, microfibre and similar • front lining • insole • sole in any type of material, can be smooth

- the upper, in the low footwear, can be opened in the heel area.
- In "SB" footwear, the following requirements are never included unless specified in detail:
- antistatic
   energy absorption of the heel
   dynamic waterproofing of the upper
   sole with lugs
- rear lining
   water-repellent upper
   anti-puncture plate or fabric.

The meaning of the stamping that you can find on the footwear is given below. They have been designed, equipped with toe caps designed to provide protection against impact when tested at an energy level of 200J".

#### EN ISO 20345:2011

Protective footwear in accordance with EN ISO 20345:2011 is called "Protective footwear".

- It is basically identical to safety footwear. The only differences are the following:
- $\bullet$  impact protection toe cap with energy of 100 J and compression of 10 KN
- it is marked with "P" (Protective) in place of the "S" (Safety).
- NB: use in all workplaces where the protection of 100 J is sufficient.

#### THE MEANING OF THE EUROPEAN STANDARDS

EN ISO 20349:2010 Small splashes of molten metal such as those produced during welding operations and related processes. EN ISO 20344:2011 Test methodology and general requirements.

EN ISO 20345:2011 Specifications of safety footwear with toe resistance at 200 J.

EN ISO 20346:2011 Specifications of protective footwear with toe resistance at 100 J. EN ISO 20347:2012 Specifications of "work" or "professional" footwear. No specific toe cap resistance.

UNI 11583:2015 Footwear marked UNI 11583:2015 meets the requirements of the UNI 11583:2015 standard which

specifies the requirements for safety, protective and work footwear for professional use for work on sloping roofs.

FOOTWEAR CLASSIFIED "S"					
SB	BASIC Requirements				
S1/01	S1/01 BASIC requirements + S1 supplemented by:	<ul> <li>closed back (also low footwear)</li> <li>antistatic</li> <li>FO resistance to hydrocarbons</li> <li>energy absorption capacity of the heel</li> </ul>			
S2/02	S2/02 BASIC requirements + S2 supplemented by:	<ul> <li>dynamic waterproofing of the upper material</li> </ul>			
S3/03	S3/03 BASIC requirements + S3 supplemented by:	<ul> <li>anti-puncture plate</li> <li>sole with lugs or tread</li> </ul>			
S4/04	S4/04 BASIC requirements + S4 supplemented by:	<ul> <li>antistatic</li> <li>energy absorption of the heel</li> <li>FO resistance to hydrocarbons</li> </ul>			
S5	S5 BASIC requirements + S5 supplemented by:	<ul> <li>anti-puncture plate</li> <li>sole with lugs or tread</li> </ul>			

#### **SLIP RESISTANCE CLASSES**

SRA	Slip resistance with ceramic ground with water and detergent.
SRB	Slip resistance with steel and glycerine ground.
SRC	Slip resistance with both conditions described above.

#### All Sparco Teamwork safety footwear is certified with SRC class slip resistance.

Marking of conformity with Regulation		Nome del fabbrican <b>SPARCO</b>	te	Production date <b>0½022</b>
(EU) 2016/425 		S3 SRC	WR	00000 - LANDO
EN ISO 20345:2011 European standard	Protection class	Slip resistance requirement	Additional requirements	Product code

The following are affixed on the gusset or on the tongue of the shoe:

• manufacturer's mark • the article code • the month and year of manufacture • CE conformity marking

PROTECTION CLASS Symbol		EN ISO 20345:2011			EN ISO 20347:2012			EN ISO EN ISO 20345:2011 20347:2012			Minimum required values EN ISO 20345:2011 + EN ISO 20347:2012			
		SB	S1	<b>S</b> 2	53	OB	01	02	03	S4	S5	04	05	
	Closed heel area	0				O	•	•	•					
	Toe cap resistant to an impact of 200J	•		•	•	-	-	-	-			-	-	Mechanical risk, toe protection, falling objects, foot impacts, height after impact ≥ 14mm (size 42)
	Toe cap resistant to static compression of 15 kN	•	•	•	•	-	-	-	-		•	-	-	Mechanical risk, toe protection, falling objects, foot impacts, height after impact ≥ 14mm (size 42)
A	Antistatic footwear	0	•	•	•	0	•	•	•	•	•	•	•	Electrical resistance of the bottom compressed between 1x105 OHM and 1x109 OHM
E	Energy absorption in the heel area	0	•	•	•	O	•	•	•	•	•	•	•	Mechanical risk: reduction of trauma to the heel resulting from impacts or falls from limited heights, mechanical energy ≥ 20 Joules
FO ex oro	Resistance to hydrocarbons of the sole	O	-	-	•	O	0	O	0			0	0	Volume increase of the sole sample < 12%
WRU	Penetration and water absorption of the upper	0	-	•	•	0	0	•	•	-	-	-	-	Resistance to penetration and absorption of water from the upper. H2O absorption after 60' ± 30% H2O transmitted after 60' ± 0.2 g
Р	Resistance to perforation of the bottom of the footwear	0	0	0	•	O	0	0		0	•	0	•	F 2 1100 N
CI	Insulation from the cold of the bottom of the footwear	0	0	0	0	0	0	0	0	0	0	0	0	Increase T ≥ 22°C placed on a plate at a T of 150°C for 30'
ні	Insulation from the heat of the bottom of the footwear	0	0	0	0	O	0	0	0	0	0	0	0	Decrease T ≥ 10°C in an environment at -17°C for 30'
С	Conductive footwear	0	-	-	-	O	-	-	-	-	-	-	-	Electrical resistance of the bottom < 1x105 OHM
HRO	Heat resistance by contact of the sole	0	0	0	0	0	0	0	0	0	0	0	0	Sample in contact at 300°C for 60"- Does not melt
AN	Ankle protection	0	0	0	0	O	0	0	0	0	0	0	0	Mechanical risk, ankle protection: average value transmitted force ≥ 10 kN maximum value <15 kN
$\triangle$	Electrically insulating footwear (Dielectric)	0*	-	-	-	O	-	-	-	0	0	0	0	Class 00 or Class 0 - CEI EN 50321 standard
WR	Water resistant footwear	0	0	0	0	o	0	O	O	-	-	-	-	After 1000 steps or after 80' of automatic dynamic cycle, no more than 3 cm2 of water must enter (stain)
Μ	Metatarsal protection	0	0	0	0	-	-	-	-	0	0	-	-	Mechanical risk, metatarsal protection: falling objects, impact to the foot. Height after impact 2 40 mm (size 42)
CR	Cutting resistance of the upper - F ≥ 1100 N	0	0	0	0	O	0	0	0	0	0	0	0	F 2 1100 N
SRC	(SRA+SRB) Requisito di antiscivolo	•	-	-	•	•	•	-	•	-	-	-	•	Protezione contro lo scivolamento su diverse superfici

= Mandatory requirement for the indicated category D = Optional requirement added to the mandatory ones, if indicated on the marking -= Non-mandatory requirement, check shoe stamping


#### ESD CEI EN 61340-5-1 2016 | COR 1:2017 STANDARD

The abbreviation ESD (ElectroStaticDischarge) indicates a discharge of static energy that passes from one body to another. In hazardous workplaces, ESD discharges can be the cause of even serious accidents (starting a fire), and can damage machinery and their sensitive components.

#### ESD shoes are required for:

• Work with microchips • Production of sensitive electrical parts • In painting

- Wthen working in contact with flammable liquids and gases
- Evaluated on ESD by conditioning the shoe at 12% relative humidity:
- resistance of the footwear/operator combination | metal electrode less than 1x10-9 ohm
- storage capacity of the electric charge of the footwear/operator combination | metal electrode less than 100 volts



#### **REGULATION (EU) 2016/425**

Article 47: EC certificates issued in accordance with Directive 89/686/EEC are valid until 21/04/2023. After 21/04/2019, all new models must be certified according to Regulation 2016/425.

COMPLIANCE WITH THE REACH REGULATION

The company complies with the REACH Regulation (EC) no. 1907/2006 in force since 1 June 2007, ensuring that the products used and supplied by SPARCO TEAMWORK:

- do not contain SVHC (Substance of Very High Concern) substances;
- do not contain substances that are on the list in Annex XIV\_ of the REACH Regulation;
- do not contain substances that are on the constantly updated Candidate List;
- do not contain substances subject to restrictions (Annex XVII of REACH) that the relative restrictions of use are observed.

Furthermore, in the event that an article contains an SVHC (Substance of Very High Concern) substance or one on the Candidate List in concentrations higher than 0.1% weight/weight, sufficient information is provided with the name of the substance and instructions helpful for the safe use of the article (see Article 59.1 of REACH).

# ALPHABETICAL INDEX

# SHOES LINES

•ADELAIDE	Page <b>27</b>	• MIKKO	Page <b>24</b>
•ALBERT	Page <b>27</b>	• MODENA	Page <b>32</b>
•ALGARVE	Page <b>48</b>	• MOTEGI	Page <b>39</b>
•ARCTIC	Page <b>45</b>	•NELSON	Page <b>20</b>
•BAKU	Page <b>38</b>	• NIGEL	Page <b>18</b>
•BOAVISTA	Page <b>48</b>	•NIKI	Page <b>20</b>
•BRUCE	Page <b>30</b>	•OKAYAMA	Page <b>40</b>
•CHARADE	Page <b>48</b>	•OTT	Page <b>24</b>
•CLAY	Page <b>29</b>	•PALMA	Page <b>46</b>
•DANI	Page 14	•PETTER	Page <b>23</b>
• DIDIER	Page <b>23</b>	•RICARD	Page <b>27</b>
<ul> <li>DONINGTON</li> </ul>	Page <b>30</b>	• RONNIE	Page <b>29</b>
•DURANGO	Page <b>47</b>	•SARNO	Page <b>33</b>
•FLAP	Page <b>36</b>	•SEB	Page <b>15</b>
•GILLES	Page <b>30</b>	•SOCHI	Page <b>40</b>
•HALO	Page <b>36</b>	•SPA	Page <b>28</b>
•HANNU	Page <b>24</b>	•SPLITTER	Page <b>34</b>
•HINWIL	Page <b>43</b>	•SPOILER	Page <b>35</b>
• JACQUES	Page <b>19</b>	•STIRIA	Page <b>40</b>
•JODY	Page <b>19</b>	•WING	Page <b>36</b>
•JOS	Page <b>18</b>	•WOKING	Page <b>43</b>
•KEKE	Page <b>20</b>	•ZELTWEG	Page <b>43</b>
•LANDO	Page 14		
•LONATO	Page <b>33</b>		
•LOSAIL	Page <b>28</b>		
•MAGIONE	Page <b>32</b>		
•MARCUS	Page <b>23</b>		
•MARTINI	Page 17		
•MAX	Page <b>15</b>		
• MIKI	Page <b>51</b>		

**9**°

## WORKWEAR

•BERMUDA	Page <b>57</b>	•PORTLAND	Page <b>62</b>
BOSTON	Page <b>56</b>	•SEATTLE	Page <b>54</b>
•DENVER	Page <b>55</b>	•TRENTON	Page <b>63</b>
HOUSTON	Page <b>55</b>	•WILSON	Page <b>59</b>
•PHOENIX	Page <b>61</b>		

### GLOVES

• HYPERGRIP			
•MECA III			
• SPORTAC			

Page	66
Page	67
Page	66

POP TOOLS

- COUNTER DISPLAY Page **71** •FLYER DISPLAY Page **71** •LANYARD Page 71 •PORTACHIAVI Page **71** • SHELF HIGHLIGHTER Page **70**
- •TOTEM
  - Page **70**

#### VALIDITY

#### From 01 January 2022 to 31 December 2022

The data and characteristics indicated in this price list are subject to changes without prior notice.

The photographic reproduction of the shades of colour may not be perfectly faithful to reality.

In order to constantly improve the collections, the products contained in this catalogue could be replaced or modified. The photos contained are purely illustrative and not binding.





teamwork@sparco.it +39 011.22.40.911



sparcoteamwork.com

#### HEADQUARTERS

SPARCO S.p.A. Via Leini, 524 10088 Volpiano (TO) - Italy Tel. +39 011 22.40.911 e-mail: info@sparco.it www.sparco-official.com

#### BRANCHES

SPARCO TEAMWORK IBERIA, SL C/ Illa de Buda, 2 Polígono industrial Can Canals 08192 Sant Quirze del Vallés. Barcelona +34 93 806 54 94 info@iberia.sparcoteamwork.com